


# B SERIES

## special

### FIRE HOSE REEL WITH CABINET AND FRAMED SUPPORT

#### Model: 25/20/25/30 B AE

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the Hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The cabinet is mounted in a surrounding support fixed to the floor. The water supply piping can be hidden inside the metalic support structure.

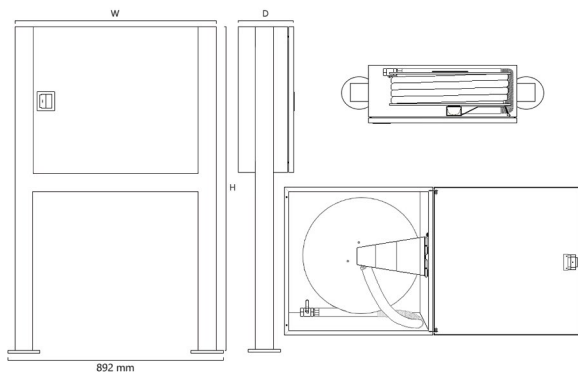

#### technical features

<b>Models</b>	25/20 B AE, 25/25 B AE and 25/30 B AE
<b>Certificate</b>	According to EN 671-1:2012
<b>Cabinet</b>	Galvanized steel ST12 - 1,5 mm Quick opening handle Powder paint finished RAL 3000 - min. 70 microns Door sign in accordance with ISO 7010 (EN 671-1 :2012)
<b>Hose Reel</b>	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment Electrostatic powder painting - min. 70 microns
<b>Base support</b>	Frame support of squared tube - 70mm
<b>Hose</b>	Ø 25mm, according to EN 694
<b>Nozzle</b>	Three positions (Shut-off / jet / spray) Ø 10mm   Factor K = 42
<b>Stop valve</b>	1" manual stop valve

MODEL	HOSE		DIMENSIONS*	REFERENCE
	Ø	Length	W x H x D	
25/20 B AE	25mm	20m	800 x 1500 x 260mm	301009
25/25 B AE	25mm	25m	800 x 1500 x 260mm	301019
25/30 B AE	25mm	30m	800 x 1500 x 300mm	301106

\* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

#### OPTIONS:

##### Color:

- RAL 9010  
 RAL \_\_\_\_\_

##### Door opening:

- Left

##### Pressure gauge:

- 0 - 25 bar

##### Hose:

- Textile coating