



B SERIES

stainless steel

FIRE HOSE REEL WITH CABINET IN STAINLESS STEEL

Model: 25/20/25/30 B AICN

Fire Hose Reel equipped with a manual stop valve, mounted on a swinging arm allowing for a 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation. The cabinet is built in stainless steel plate (AISI 304), allowing its use in outdoors and in corrosive atmospheres.

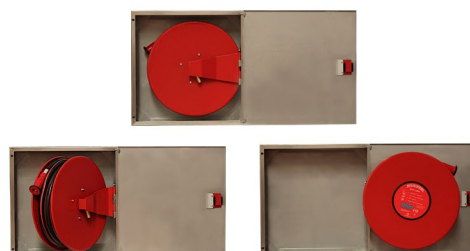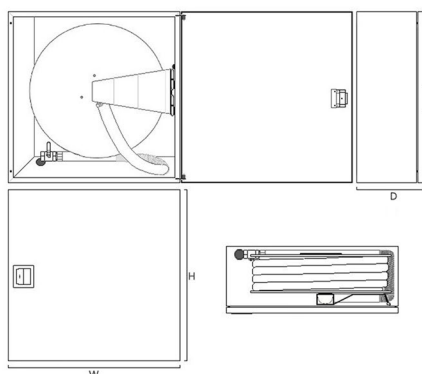

technical features

| | |
|--------------------|--|
| Models | 25/20 B AICN, 25/25 B AICN and 25/30 B AICN |
| Certificate | According to EN 671-1:2012 |
| Cabinet | Stainless steel (AISI 304) - 1,5 mm Quick opening handle Recess-mounting or wall-mounting Door sign in accordance with ISO 7010 (EN 671-1 :2012) |
| Hose Reel | Steel side discs Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° 1,10 mt supply hose including spiral spring Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min. 70 microns |
| Hose | Ø 25mm, according to EN 694 |
| Nozzle | Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42 |
| Stop valve | 1" manual stop valve |

| MODEL | HOSE | | DIMENSIONS * | REFERENCE |
|--------------|------|--------|-------------------|-----------|
| | Ø | Length | W x H x D | |
| 25/20 B AICN | 25mm | 20m | 650 x 650 x 260mm | 301002 |
| 25/25 B AICN | 25mm | 25m | 650 x 650 x 260mm | 301021 |
| 25/30 B AICN | 25mm | 30m | 650 x 650 x 300mm | 301048 |

* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Stainless Steel:

☐ AISI 316

Door opening:

☐ Left

Pressure Gauge:

☐ 0 – 25 bar

Hose:

☐ Textile coating