


# B SERIES

stainless steel

## FIRE HOSE REEL WITH CABINET AND BASE SUPPORT IN STAINLESS STEEL

### Model: 25/20/25/30 B SB AICN

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The cabinet is mounted on a base support which is fixed to the ground. The water supply piping can be hidden inside the metallic support structure. The cabinet and the base support are built in stainless steel (AISI 304), which allows its use outdoors and in corrosive atmospheres.

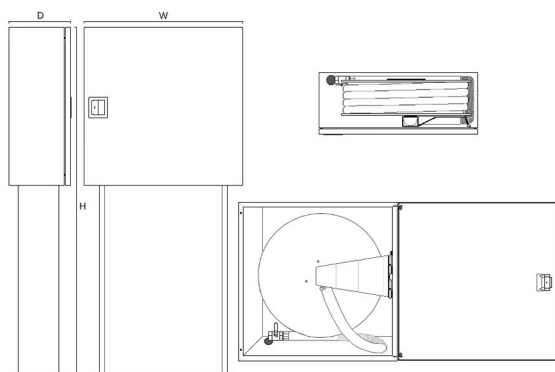

### technical features

<b>Models</b>	25/20 B SB AICN, 25/25 B SB AICN and 25/30 B SB AICN
<b>Certificate</b>	According to EN 671-1:2012
<b>Cabinet</b>	Stainless steel (AISI 304) - 1,5 mm Quick opening handle Door sign in accordance with ISO 7010 (EN 671-1 :2012)
<b>Hose Reel</b>	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment
<b>Support Base</b>	Stainless steel (AISI 304) - 1,5mm Dimension: 850 x 500 x 180mm Electrostatic powder painting - min. 70 microns
<b>Hose</b>	Ø 25mm, according to EN 694
<b>Nozzle</b>	Three positions (Shut-off / jet / spray) Ø 10mm   Factor K = 42
<b>Stop valve</b>	1" manual stop valve



MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length		
25/20 B SB AICN	25mm	20m	650 x 1500 x 260mm	301089
25/25 B SB AICN	25mm	25m	650 x 1500 x 260mm	301039
25/30 B SB AICN	25mm	30m	650 x 1500 x 300mm	301085

\* Dimensions above are standard. Any other dimensions can be manufactured according to customer needs.

#### OPTIONS:

##### Stainless Steel:

☐ AISI 316

##### Door opening:

☐ Left

##### Pressure Gauge:

☐ 0 – 25 bar

##### Hose:

☐ Textile coating