


# B SERIES

stainless steel

FIRE HOSE REEL WITH CABINET ON TOP OF  
EQUAL SIZED EQUIPMENT COMPARTMENT  
IN STAINLESS STEEL


## Model: 25/20/25/30 B SBA AICN

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The Hose Reel cabinet is mounted on top of compartment allowing the stowage of a fire extinguisher, hydrant valve (DN50) or other equipment. Both cabinets are built in stainless steel plate (AISI 304) which allows its use outdoor and in corrosive atmospheres.

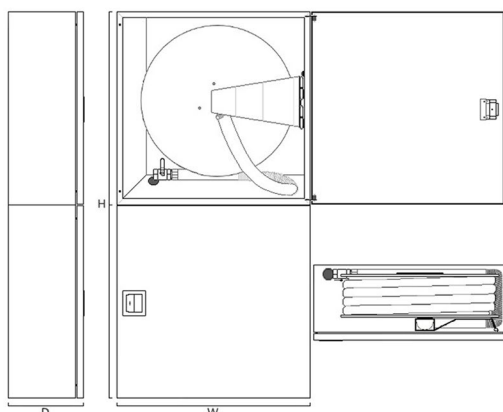

## technical features

<b>Models</b>	25/20 B SBA AICN, 25/25 B SBA AICN and 25/30 B SBA AICN
<b>Certificate</b>	According to EN 671-1:2012
<b>Upper Cabinet</b>	Stainless steel (AISI 304) - 1,5 mm Quick opening handle Door sign in accordance whit ISO 7010 (EN 671-1 :2012)
<b>Lower Cabinet</b>	Stainless steel (AISI) - 1,5 mm Quick opening handle Dimensions: 650 x 650 x (260/300mm)
<b>Hose Reel</b>	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment
<b>Hose</b>	Ø 25mm, according to EN 694
<b>Nozzle</b>	Three positions (Shut-off / jet / spray)) Ø 10mm   Factor K = 42
<b>Stop valve</b>	1" manual stop valve

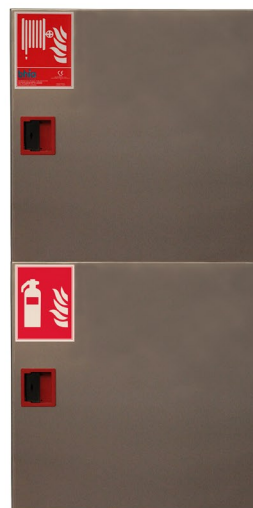

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length		
25/20 B SBA AICN	25mm	20m	650 x 1300 x 260mm	301125
25/25 B SBA AICN	25mm	25m	650 x 1300 x 260mm	301098
25/30 B SBA AICN	25mm	30m	650 x 1300 x 300mm	301126

\* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

### OPTIONS:

#### Stainless Steel:

☐ AISI 316

#### Door opening:

☐ Left

#### Pressure Gauge:

☐ 0 – 25 bar

#### Hose:

☐ Textile coating