


B SERIES

special

FIRE HOSE REEL WITH CABINET ON TOP OF EQUAL SIZED EQUIPMENT COMPARTMENT CABINET

Model: 25/20/25/30 B SBA

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The Hose Reel cabinet is mounted on top of compartment allowing the stowage of a fire extinguisher, hydrant valve (DN50) or other equipment.

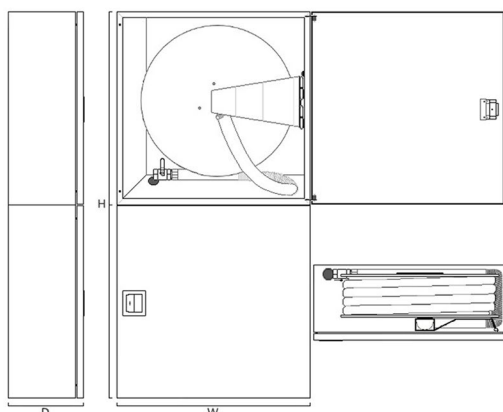

technical features

Models	25/20 B SBA, 25/25 B SBA and 25/30 B SBA
Certificate	According to EN 671-1:2012
Upper Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Powder paint finished RAL 3000 - min. 70 microns Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Lower Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Powder paint finished RAL 3000 - min. 70 microns Dimensions: 650 x 650 x (260/300mm)
Hose Reel	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve



MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length		
25/20 B SBA	25mm	20m	650 x 1300 x 260mm	301123
25/25 B SBA	25mm	25m	650 x 1300 x 260mm	301107
25/30 B SBA	25mm	30m	650 x 1300 x 300mm	301124

* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Color:

- ☐ RAL 9010
☐ RAL _____

Door opening:

- ☐ Left

Pressure gauge:

- ☐ 0 – 25 bar

Hose:

- ☐ Textile coating