


B SERIES

standard

FIRE HOSE REEL WITH CABINET

Model: 25/20/25/30 B

Fire Hose Reel equipped with a manual stop valve, mounted on a swinging arm allowing for a 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation.

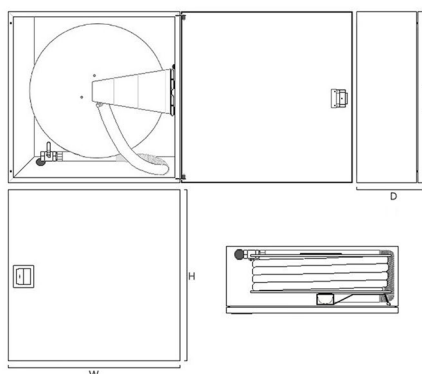

technical features

Models	25/20 B, 25/25 B and 25/30 B
Certificate	According to EN 671-1:2012
Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Recess-mounting or wall-mounting Powder paint finished RAL 3000 - min 70 micron Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose Reel	Steel side discs Ø550mm - 12mm Centre parts made of brass Swinging arm support - Swinging angle 180° 1,10 mt supply hose including spiral spring Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min. 70 microns
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	W x H x D	
25/20 B	25mm	20m	650 x 650 x 260mm	301022
25/25 B	25mm	25m	650 x 650 x 260mm	301018
25/30 B	25mm	30m	650 x 650 x 300mm	301024

* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Color:

- ☐ RAL 9010
☐ RAL _____

Door opening:

- ☐ Left

Pressure gauge:

- ☐ 0 – 25 bar

Hose:

- ☐ Textile coating