


# ESP SERIES

## stainless steel


### FIRE HOSE REEL STAINLESS STEEL CABINET AND FOAM TANK

#### Model: 25/20/25/30 ESP AICN

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify the installation process. The cabinet is mounted under a foam deposit. The cabinet is built in stainless steel (AISI 304) which allows its use outdoors and in corrosive atmospheres. It is suitable for road tunnels, gas stations, industrial areas, workshops and all places where there are flammable liquids.



SEM FOTO

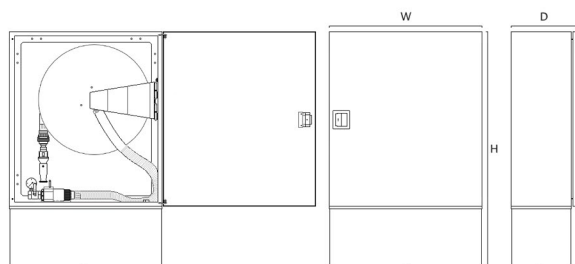

#### technical features

<b>Models</b>	25/20 ESP AICN, 25/25 ESP AICN and 25/30 ESP AICN
<b>Certificate</b>	N/A
<b>Cabinet</b>	Stainless steel (AISI 304) 1,5mm - Quick opening handle Removal galvanized steel back Wall-mounting - Color: Red RAL 3000 Powder paint finished RAL 3000 - min. 70 micron Door sign according to ISO 7010 EN 671-1:2012
<b>Hose Reel</b>	Steel side discs of Ø550mm, 1,2 mm - Centre parts made of brass Swinging arm support - Corrosion treatment Supply hose including spiral spring Electrostatic powder painting - min. 70 microns, RAL 3000 1 proportioner of foam model BYPP100 with a 3% water and foam debit, 70 l/min at 7 bar Two positions proportioner: water or water + foam
<b>Tank</b>	Stainless steel (AISI 304) with 50lt capacity of AFFF foam (not included)
<b>Hose</b>	Ø 25mm, according to EN 694:2014
<b>Nozzle</b>	1 water nozzle VIPER INDUSTRIAL model STI30PV with a 125 l/min. debit at 7 bar 1VIPER CEP 1560 foam expander (for nozzle coupling)
<b>Stop valve</b>	1" manual stop valve with pressure gauge



SEM FOTO

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	W x H x D	
25/20 ESP AICN	25mm	20m	700 x 1080 x 300mm	301151
25/25 ESP AICN	25mm	25m	700 x 1080 x 300mm	301152
25/30 ESP AICN	25mm	30m	700 x 1080 x 300mm	301153

\* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

#### OPTIONS:

##### Stainless steel:

☐ AISI 316

##### Door opening:

☐ Left

##### Pressure gauge:

☐ 0 – 25 bar

##### Hose:

☐ Textile coating