


G SERIES

stainless steel

FIRE HOSE REEL WITH CABINET ON TOP
OF EQUIPMENTS COMPARTMENT FOR
NARROW SPACES IN STAINLESS STEEL

Model: 25/20/25/30 G SBA AICN

Fire Hose Reel with manual stop valve, mounted in a drawer so it can be pulled longitudinally outside the cabinet. The Hose Reel can be easily removed from the cabinet to simplify the installation process. The water supply piping can be hidden inside the metallic lower compartment structure. The upper cabinet and lower compartment are built in stainless steel (AISI 304), which allows its use outdoors and in corrosive atmospheres. The lower compartment can be used for the stowage of a fire extinguisher, a hydrant landing valve (DN50) or other equipment. Ideal for use in narrow spaces.

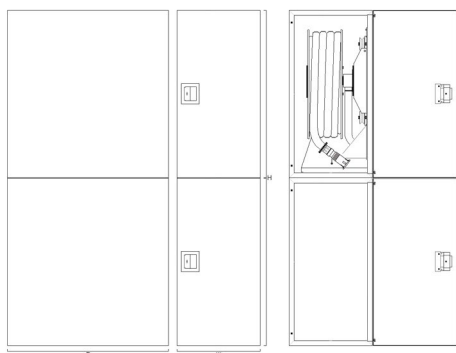

technical features

Models	25/20 G SBA AICN, 25/25 G SBA AICN and 25/30 G SBA AICN
Certificate	According to EN 671-1:2012
Upper Cabinet	Stainless steel (AISI 304) - 1,5 mm
+	Quick opening handle
Lower Cabinet	Recess-mounting or wall-mounting
	Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose reel	Steel side discs Ø550mm - 1,2 mm Centre parts made of brass Supported by side rail on pulleys 1,10 mt supply hose including spiral spring Omni-directional guides for hose orientation Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min, 70 micron
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Sht-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	H x W x D	
25/20 G SBA AICN	25mm	20m	1500 x 380 x 720mm	301143
25/25 G SBA AICN	25mm	25m	1500 x 380 x 720mm	301144
25/30 G SBA AICN	25mm	30m	1500 x 420 x 720mm	301145

* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Stainless Steel:

☐ AISI 316

Door opening:

☐ Left

Pressure Gauge:

☐ 0 - 25 bar

Hose:

☐ Textile coating