



G SERIES

standard

FIRE HOSE REEL WITH CABINET FOR NARROW SPACES

Model: 25/20/25/30 G

Fire Hose reel with manual stop valve, mounted in a drawer to enable the Hose Reel to be pulled longitudinally outside the cabinet. The Hose Reel can be removed from the drawer to simplify the installation process. Ideal for narrow spaces.

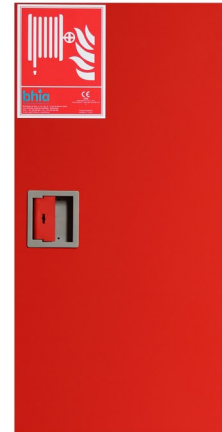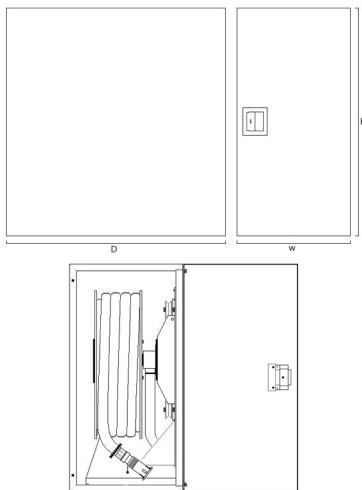

technical features

Models	25/20 G, 25/25 G e 25/30 G
Certificate	According to EN 671-1:2012
Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Recess-mounting or wall-mounting Powder paint finished RAL 3000 - min. 70 micron Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose reel	Stil side discs Ø550mm - 1,2 mm Centre parts made of brass Supported by side rail on pulleys 1,10 mt supply hose including spiral spring Omni-directional guide for hose orientation Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min- 70 micron
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	H x W x D	
25/20 G	25mm	20m	750 x 380 x 720mm	301015
25/25 G	25mm	25m	750 x 380 x 720mm	301036
25/30 G	25mm	30m	750 x 420 x 720mm	301059

*Dimensios above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Color:

- RAL 9010
 RAL _____

Door opening:

- Left

Pressure gauge:

- 0 – 25 bar

Hose:

- Textile coating