


M SERIES

stainless steel

FIRE HOSE REEL WITH CABINET AND EQUIPMENT COMPARTMENT IN STAINLESS STEEL

Model: 25/20/25/30 M AICN

Fire Hose Reel equiped with a manual stop valve, mounted on a swinging arm allowing for a 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation. The cabinet is supplied with an equipment compartment to allow storage space for a fire extinguisher, hydrant landing valve (DN50) or other equipment. The cabinet is built in stainless steel (AISI 304) allowing the Fire Hose Reel to be used outdoors and in corrosive atmospheres.

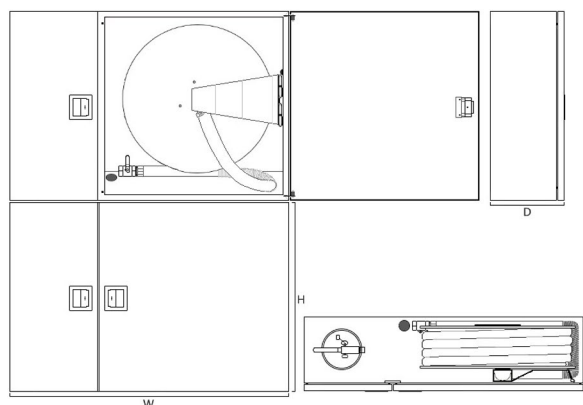

technical features

Models	25/20 M AICN, 25/25 M AICN and 25/30 M AICN
Certificate	According to EN 671-1:2012
Cabinet	Stainless steel (aisi 304) - 1,5 mm Quick opening handle Equipment compartment Recess-mounting or wall-mounting Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose Reel	Steel side discs Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° 1,10 mt supply hose including spiral spring Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min. 70 microns
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	W x H x D	
25/20 M AICN	25mm	20m	950 x 650 x 260mm	301026
25/25 M AICN	25mm	25m	950 x 650 x 260mm	301014
25/30 M AICN	25mm	30m	950 x 650 x 300mm	301029

* Dimensions above are standard. Any other dimensions can be manufactured according to customer's needs.

OPTIONS:

Stainless Steel:

☐ AISI 316

Door opening:

☐ Left

Pressure Gauge:

☐ 0 – 25 bar

Hose:

☐ Textile coating