


M SERIES

special

FIRE HOSE REEL WITH CABINET AND EQUIPMENT COMPARTMENT ON A SUPPORT BASE

Model: 25/20/25/30 M SB

Fire hose Reel with manual stop valve, on a swinging arm allowing 180° swing, enabling the Hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The cabinet is mounted on a support fixed to the ground. The water supply piping can be hidden inside the metallic support structure. The cabinet is provided with an equipment compartment allowing the stowage of a fire extinguisher, a hydrant landing valve (DN50) or other equipment.

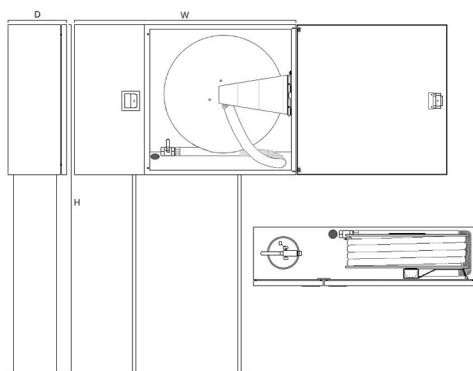

technical features

Models	25/20 M SB, 25/25 M SB and 25/30 M SB
Certificate	According to EN 671-1:2012
Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Equipment compartment Powder paint finished RAL 3000 - min. 70 microns Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose Reel	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment
Support Base	Galvanized steel ST12 - 1,5mm Dimension: 850 x 500 x 180mm Electrostatic powder painting - min. 70 microns
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	W x H x D	
25/20 M SB	25mm	20m	950 x 1500 x 260mm	301127
25/25 M SB	25mm	25m	950 x 1500 x 260mm	301027
25/30 M SB	25mm	30m	950 x 1500 x 300mm	301128

* Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Color:

- ☐ RAL 9010
☐ RAL _____

Door opening:

- ☐ Left

Pressure gauge:

- ☐ 0 – 25 bar

Hose:

- ☐ Textile coating