


M SERIES

standard

FIRE HOSE REEL WITH CABINET AND EQUIPMENT COMPARTMENT

Model: 25/20/25/30 M

Fire Hose Reel equipped with a manual stop valve, mounted on a swinging arm allowing for a 180° swing, enabling the hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation. The cabinet is supplied with an equipment compartment to allow storage space for a fire extinguisher, hydrant landing valve (DN50) or other equipment.

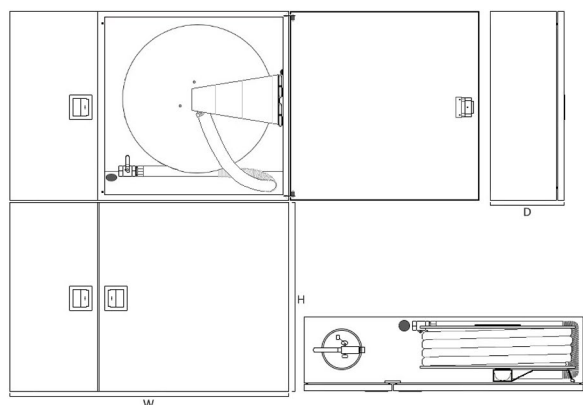

technical features

Models	25/20 M, 25/25 M and 25/30 M
Certificate	According to EN 671-1:2012
Cabinet	Galvanized steel ST12 - 1,5 mm Quick opening handle Equipment compartment Recess-mounting or wall-mounting Powder paint finished RAL 3000 - min 70 micron Door sign in accordance with ISO 7010 (EN 671-1 :2012)
Hose Reel	Steel side discs Ø550mm - 12mm Centre parts made of brass Swinging arm support - Swinging angle 180° 1,10 mt supply hose including spiral spring Powder paint finished RAL 3000 Corrosion treatment Electrostatic powder painting - min. 70 microns
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve



MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length		
25/20 M	25mm	20m	950 x 650 x 260mm	301025
25/25 M	25mm	25m	950 x 650 x 260mm	301017
25/30 M	25mm	30m	950 x 650 x 300mm	301077

* Dimensions above are standard. Any other dimensions can be manufactured according to customer's needs.

OPTIONS:

Color:

- ☐ RAL 9010
☐ RAL _____

Door opening:

- ☐ Left

Pressure gauge:

- ☐ 0 - 25 bar

Hose:

- ☐ Textile coating