

P SERIES


ROT DN33

FIRE HOSE REEL

Model: FO33/20 - FO33/30

R.I.A. Fixed:

- R.I.A. compliant with Standard NF EN 671-1 and regulations for products construction EU no. 305/2011.
- Meets the requirements of the installation rule of the French Standard NFS 62-201.
- Manufactured in tube and sheet steel with epoxy resin coating oven-cured polyester.
- Simple and robust design allowing great ease of assembly and maintenance.
- Composite DMA or brass diffuser valve (only in DN33 version).
- Mounting: Integrated wall bracket.
- Maintenance: Verification, dismantling, etc., interventions may be carried out with the shut-off valve under pressure, it is therefore not necessary to isolate and drain all or part of the installation.

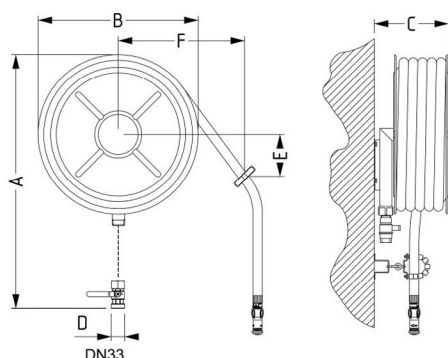

technical features

FEATURES	TYPE >	FO 33/20 DMA	FO 33/30 DMA
Article code		09000432 brass nozzle: 09000431	09000422 brass nozzle: 09000421
Ø nominale		33mm	
Hose length		20 m	30 m
Dimensions in mm:			
Height	A	750	
Length	B	570	
Depth	C	460	
Connection	D	1" 1/2 M	
Position of the orientator vertically	E	300	
Position of the orientator horizontally	F	450	
Effective reach (meters)	Straight jet	13,5 / 14,8	
at 0,2 Mpa on the shut-off valve	Diffused jet	3,5 / 6,1	
Unloaded weight		28 Kg	36 Kg
Certificate N.F. EN 671-1		RC/01/003	

Bhia » Ref^a

301193

301194



Company registered
in ANEPC nº 712/12

