

P SERIES

ROT DN33

FIRE HOSE REEL WITH FOAM TANK




Model: P.I.A. PT33/20 - PT33/30

FIRE HOSE REEL WITH FOAM TANK

P.I.A. Swivel Rotating DN33

A P.I.A. is firefighting equipment that differs from an R.I.A. by installation of an extinguisher agent composed of water and a foam concentrate.

- P.I.A. Complies with NF 021 and Standard NF EN 671-1 Excludes chapters 10.3, 10.4 and 10.5.
- Meets the requirements of the French Standards NFS 62-201 installation rule.
- Manufactured in tube and sheet steel with coating in epoxy polyester resin polymerized in the oven.
- Simple and robust design allowing great ease of assembly and maintenance.
- Low expansion foam lance.
- Adjustable pre-mixer with 4 position wheel (closed, 3% and 6%) equipped with a non-return valve and a suction hose.
- Mounting: The removable wall bracket is sealed directly to the wall before assembly and connection of the post.
- Usable on class B fires.

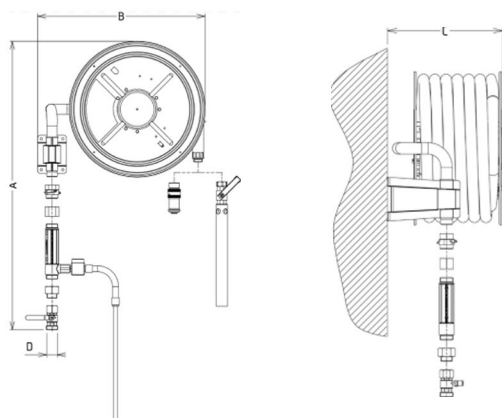

technical features

FEATURES	TYPE >	P.I.A. PT 33/20	P.I.A. PT 33/30
Article code		Nozzle BF: 09000520	Nozzle BF: 09000530
		Nozzle DMA: 09001620	Nozzle DMA: 09001630
Ø nominale		33mm	
Hose length		20 m	30 m
Dimensions in mm:			
Height	A	1095	
Width	B	700	
Depth	C	445	
Connection	D	1" 1/2 M	
Debit		≥ 130 l/min at 2,5 bar at the nozzle	
Scope		≥ 15 m at 2,5 bar at the nozzle	
Unloaded weight		33 Kg	41 Kg
Certificate NF		Nozzle BF : RC/03/001 Nozzle DMA : RC/03/002	