


# BIS SERIES

## SIAMESE LANDING VALVE

### Model: BIS

Siamese landing valve KW, 3" x 2 x 75mm. It is preferably intended for pendant mounting on dry SI columns, suitable for outdoor installation, allowing an inverted assembly, two inlets with a large 45 ° to avoid bending the supply hoses, equipped with spring-loaded check valves, including drain valve, symmetrical connections type Storz B75 with chains and plugs, female thread outlet DN80 bsp.

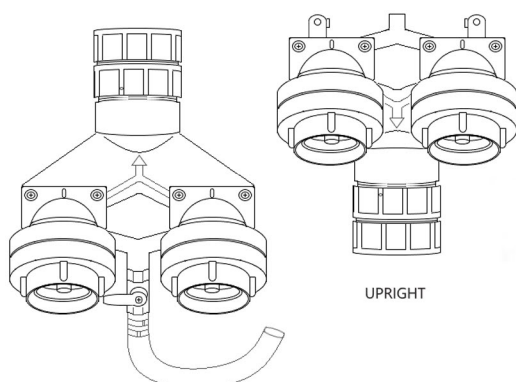

### technical features

<b>Model</b>	BIS (KW)
<b>Landing valve</b>	Bronze body 2 check valves Water drain valve DIN 14461 - T4 PN 16 Powder paint finished - Ral 3000 Weight 19,40Kg
<b>Connections</b>	Two connections with flange and storz caps B75 with chain DN80 3 "bsp output

MODEL	DIMENSIONS				REFERENCE
	Inlet	Outlet	Axle spacing	Valve	
BIS (KW)	(x2) Ø 75mm Storz	DN 80 Ø 3"	185mm	335 x 315 x 275mm	904022