



BIS SERIES

SIAMESE LANDING VALVE

Model: BIS

Siamese landing valve, "Bhia", branded with a 4" outlet and 2 75mm inlets, flanged with storz aluminium caps and chains. Destined preferentially to be mounted on office buildings, commercial and industrial areas, connected to a water feeding source of dry or wet systems and constituting an indispensable equipment for the exclusive use of fire department unit, having as its function to feed the fire suppression system in case it fails.

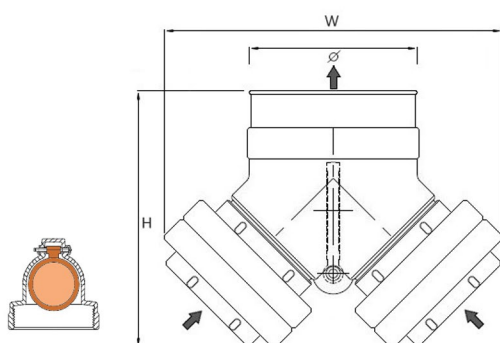

technical features

Model	BIS
Certificates	FM end UL
Landing valve	Cast brass body 4" feeding outlet 1 check valve Powder paint finished - Ral 3000
Connections	Two Ø 2" 1/2 inlets with flanges and B75 storz caps with chain Output 4" with female gas yhread. Working pressure: 20,7 bar Burst pressure: 30 bar

MODEL	DIMENSIONS				REFERENCE
	Inlet	Outlet	Axle spacing	W x H x D	
BIS	(x2) Ø 75mm Storz	Ø 4"	180mm	290 x 230 x 125mm	904004



BH-1 (86A)(S201B)



CERTIFICATIONS	a	b
UL FM	4"	2½"