


B SERIES

stainless steel

FIRE HOSE REEL WITH CABINET AND FRAMED SUPPORT IN STAINLESS STEEL

Model: 25/20/25/30 B AE AICN

Fire Hose Reel with manual stop valve, mounted on a swinging arm allowing 180° swing, enabling the Hose to run in all directions. The Hose Reel can be easily removed from the cabinet to simplify its installation process. The cabinet is mounted in a surrounding support fixed to the floor. The water supply piping can be hidden inside the metallic support structure. The cabinet and support are built in stainless steel (AISI 304) which allows its installation outdoors or in corrosive atmospheres.

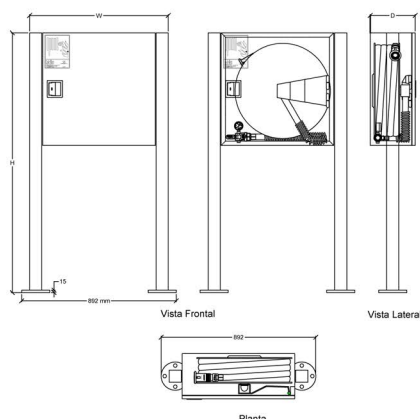

technical features

Models	25/20 B AE AICN, 25/25 B AE AICN and 25/30 B AE AICN
Certificate	According to EN 671-1:2012
Cabinet	Stainless steel (AISI 304) - 1,5 mm Quick opening handle Door sign in accordance with ISO 7010 (EN 671-1:2012)
Hose Reel	Steel side discs of Ø550mm - 1,2mm Centre parts made of brass Swinging arm support - Swinging angle 180° Powder paint finished RAL 3000 - min. 70 microns Corrosion treatment Electrostatic powder painting - min. 70 microns
Support	Stainless steel support of squared tube - 80mm
Hose	Ø 25mm, according to EN 694
Nozzle	Three positions (Shut-off / jet / spray) Ø 10mm Factor K = 42
Stop valve	1" manual stop valve

MODEL	HOSE		DIMENSIONS *	REFERENCE
	Ø	Length	W x H x D	
25/20 B AE AICN	25mm	20m	800 x 1500 x 260mm	301090
25/25 B AE AICN	25mm	25m	800 x 1500 x 260mm	301066
25/30 B AE AICN	25mm	30m	800 x 1500 x 300mm	301091

*Dimensions above are standard. Any other dimensions can be manufactured according to customers needs.

OPTIONS:

Stainless Steel:

☐ AISI 316

Door opening:

☐ Left

Pressure Gauge:

☐ 0 - 25 bar

Hose:

☐ Textile coating